



Ready for snow since 1929


M A N U F A C T U R E R
OF SNOWPLOW AND ICE REMOVAL EQUIPMENT

SNOWPLOW IDEAL FOR CLEARING PARKING LOTS

OH4400 *PH*

VERSATILITY DIRECTLY FROM THE CAB



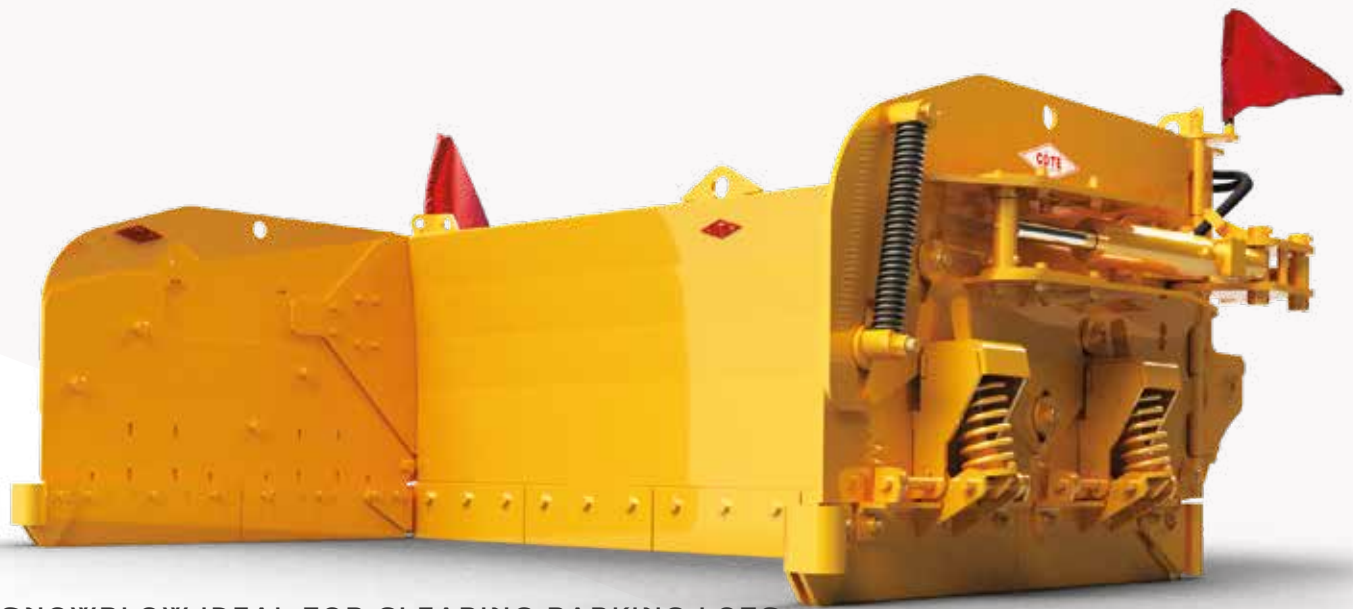

SNOWPLOW IDEAL FOR CLEARING PARKING LOTS

OH4400PH

The most versatile snowplow in the CÔTÉ product line, the **OH4400PH** puts the snow clearing configuration you need right at your fingertips, without having to get out of your vehicle. The hydraulic panels can be positioned in a number of ways with the flick of a multifunction lever installed inside the cab.

Designed differently, but just as tough, the facet-folded moldboard is flattened. This lets you get as close to obstacles as possible for a flawless result.

MODELS, DIMENSIONS AND WEIGHTS

| MODEL | CLOSED PANELS | OPEN PANELS | HEIGHT AND WIDTH OF THE MOLDBOARD | HEIGHT AND WIDTH OF THE PANELS | APPROX. WEIGHT |
|-------|---------------|-------------|-----------------------------------|--------------------------------|----------------|
| 4401 | 140 in. | 220 in. | 44 in. x 120 in. | 44 in. x 50 in. | 5033 lb. |
| 4402 | 140 in. | 240 in. | 44 in. x 120 in. | 44 in. x 60 in. | 5200 lb. |
| 4403 | 140 in. | 264 in. | 44 in. x 120 in. | 44 in. x 72 in. | 5400 lb. |

* This is the overall width and not the snow clearance length.

W. Côté et fils reserves the right to modify the design of its products without notice.

TECHNICAL SPECIFICATIONS

- One-piece structural facet-folded moldboard
- Horizontal self-levelling system adjusts to road imperfections
- Multi-section blade tipping system unique to CÔTÉ
- 3/4"X 8" non-reversible tempered steel wear blade
- 32° left and right snow removal angle
- Dual cross-over release valve to protect the orienting cylinders in the event of an impact
- Three-way electric diverter valve
- 12V or 24V multifunction lever (includes harness and electrical connectors)
- Panels with ultra-strong 180° hinge system activated by cylinders protected by a dual cross-over release valve
- Panels with spring-loaded self-floating system that adjusts to road imperfections
- Independent adjustable-flow control valve to control the panels' speed
- Steel side guards for clearing along a sidewalk

OPTIONS

- Tungsten carbide blade
- Tungsten carbide side guards installed at the end of the panel for clearing along sidewalks
- 12V or 24V multifunction lever (includes harness and electrical connectors)
- Three-way electric diverter valve to simultaneously activate both panels for greater productivity





Ready for snow since 1929

19, Côté Street
Mercier (Québec)
Canada, J6R 2B9

☎ 450-691-2967

@ info@w-cote.com

www.w-cote.com

M A N U F A C T U R E R
OF SNOWPLOW AND ICE REMOVAL EQUIPMENT

